24-HOUR CONSTRUCTION NOTICE
November 14, 2025



CONCRETE STREET RECONSTRUCTION

Coso Avenue from Precita Avenue to Coleridge Street

When: Replacement of 9 concrete panels **December 1-5, 2025**. Weather and construction issues could impact the schedule. General workdays and hours (weather permitting) are Monday – Friday, 7:00 a.m. to 5:00 p.m.

Where: Work will occur on Coso Avenue between Precita Avenue and Coleridge Street. There are no driveways or garages on the portion of Coso Avenue where the concrete panels will be replaced.

Why: As part of the restoration after the replacement of water pipelines, concrete streets that were excavated will now be reconstructed. This work requires us to remove and replace the 9 concrete panels that have been disrupted by our water main installation trench.

What to expect during construction: Industry standards require the newly poured concrete panels be closed to traffic while they cure (dry) to ensure the concrete achieves its maximum compressive strength. The total curing time is expected to take up to 7 days before the panels can be opened to regular roadway traffic. There may be noise, vibration, dust, parking and traffic impacts in the work zone and disruption to normal neighborhood activity.



Crews will excavate and remove the 9 existing concrete street panels and grade the site. They will then plate over the panel areas to allow access on the street.



Wooden forms will be placed and the concrete panels will be poured. **Once the concrete is poured, vehicles cannot drive over the panels until inspectors approve the panels for street access** – expected to last up to 7 days after the pour. This is to allow the concrete to cure.



No street parking will be allowed in the work zone and in areas where concrete needs to cure. Please pay attention to posted signage.

Contact: Steve Kech | SFPUC
skech@sfwater.org
(888) 801-2661 ext. 3

Mitchell Engineering Construction
1395 Evans Ave., SF, CA 94124
(415) 227-1240

San Francisco Water Power Sewer
Services of the San Francisco Public Utilities Commission

San Francisco Water Power Sewer
Services of the San Francisco Public Utilities Commission

Making Upgrades

WD-2720

CONCRETE STREET RECONSTRUCTION

LEARN MORE AND CONNECT WITH US!

24-HOUR CONSTRUCTION NOTICE

December 1-5, 2025

A San Francisco Public Utilities Commission (SFPUC) contractor, Mitchell Engineering, will be reconstructing concrete street panels on Coso Avenue (see map below). Parking and traffic will be temporarily impacted.

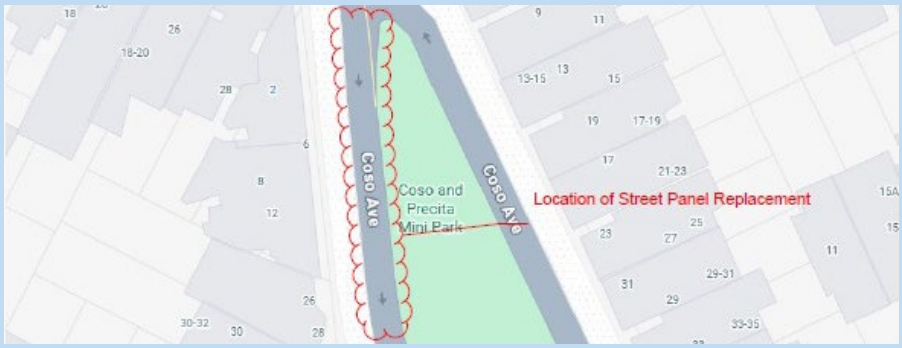

To learn more and for project updates:
sfpuc.gov/construction

Para obtener más información y novedades sobre el proyecto:
sfpuc.gov/construction

若要襉解雲榳鰾嫙稓程雲銇：
sfpuc.gov/construction

Para alamin ang higit pa at para sa mga update sa proyekto:
sfpuc.gov/construction

Reconstrucción de calles de hormigón
Aviso de obra a 14 días
La Comisión de Servicios Públicos de San Francisco (SFPUC) ha contratado a una empresa para reconstruir calles de hormigón concreto en su vecindario. Si necesita ayuda en español llame al (415) 554-3289.

北水系統鄧弤稓程
14 樢靼稓程鍪稓通知
舊金山公用事業委員會 (SFPUC) 已聘請承包商來重建您所在社區的混凝土街道. 如果您需要中文協助、請致電 (415) 554-3289.

Muling pagtatayo ng mga konkretong kalye
14 Araw na Abiso sa Konstruksyon
Nag-hire ang San Francisco Public Utilities Commission (SFPUC) ng contractor para muing itayo ang kongkretong kalye sa inyong kapitbahayan. Kung kailangan ninyo ng tulong sa Filipino mangyaring tumawag sa (415) 554-3289.

Find us online at **sfpuc.org**

Follow us

San Francisco Water Power Sewer
Services of the San Francisco Public Utilities Commission

San Francisco Public Utilities Commission
525 Golden Gate Avenue, 12th Floor
San Francisco CA 94102